

**ADDENDUM NO. 1  
CONSTRUCTION OF THE  
WATER AND DRAINAGE FACILITIES  
TO SERVE  
BELLAIRE BOULEVARD EXTENSION  
WITHIN LAKEMONT DEVELOPMENT  
(EAST OF LAKEMONT BEND LANE)  
FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 122  
CITY OF HOUSTON E.T.J.  
FORT BEND COUNTY, TEXAS**

**AUGUST 12, 2010**

**LJA JOB NO. 0385-0406 (9.4)**


---

The following changes will be considered part of the Construction Plans, Bid Proposal and Contract Documents:

1.) Reference: **Contract Documents – Bid Proposal**

Replace: Pages 1 through 10 of 10 with revised Pages 1 through 11 of 11 (attached).

There are no other changes or revisions to the Construction Plans, Bid Proposal and Contract Documents at this time.

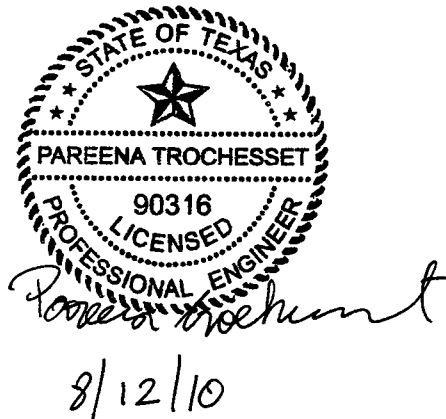

**BID PROPOSAL**

Date: \_\_\_\_\_

Bid of \_\_\_\_\_  
(Legal Name of Bidder – Company)

- an individual proprietorship
- a corporation organized and existing under the laws of \_\_\_\_\_
- a partnership consisting of \_\_\_\_\_  
\_\_\_\_\_
- a joint venture
- other \_\_\_\_\_

**FOR:**

**CONSTRUCTION OF THE  
WATER AND DRAINAGE FACILITIES  
TO SERVE  
BELLAIRE BOULEVARD EXTENSION  
WITHIN LAKEMONT DEVELOPMENT  
(EAST OF LAKEMONT BEND LANE)  
FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 122  
CITY OF HOUSTON E.T.J.  
FORT BEND COUNTY, TEXAS**

**LJA JOB NO. 0385-0406**

**TO:**

**FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 122**  
c/o LJA Engineering & Surveying, Inc.  
2929 Briarpark Drive, Suite 200  
Houston, Texas 77042

**PROPOSAL BIDDING SHEET**

**CONSTRUCTION OF THE  
WATER AND DRAINAGE FACILITIES  
TO SERVE  
BELLAIRE BOULEVARD EXTENSION  
WITHIN LAKEMONT DEVELOPMENT  
(EAST OF LAKEMONT BEND LANE)  
FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 122  
CITY OF HOUSTON E.T.J.  
FORT BEND COUNTY, TEXAS**

**LJA JOB NO. 0385-0406**

Gentlemen:

Pursuant to the foregoing Invitation and Instructions to Bidders, the undersigned bidder hereby proposes to do all the work for the unit prices bid to furnish all necessary superintendence, labor, machine, equipment, tools, materials, insurance and miscellaneous items, to complete all work according to the bids, as provided in the construction plan and contract documents for the construction of the Water and Drainage Facilities to Serve Bellaire Boulevard Extension Within Lakemont Development (East of Lakemont Bend Lane), and clean up the site to the satisfaction of the Owner/Engineer, and bind himself on acceptance of this proposal to execute a contract and bonds for completing said project within the time stated for the following prices, to wit:

**WATER ITEMS**

<b>ITEM NO.</b>	<b>QTY.</b>	<b>UNIT</b>	<b>ITEM DESCRIPTION</b>	<b>UNIT PRICE</b>	<b>AMOUNT</b>
1.	1,620	LF	12" PVC Water Pipe, AWWA C-900, DR 18, Class 150, All Depths, Includes all Fittings, Complete in place	\$ _____	\$ _____
2.	5	EA	Flushing Valve Unit, All Depths, Includes Appropriate Tee, 6" Gate Valve & Box, Lead and Flushing Valve, Complete in place	\$ _____	\$ _____
3.	3	EA	12" AWWA Gate Valve and Box, All Depths, Complete in place	\$ _____	\$ _____
4.	1	EA	2" Blow-Off Valve and Box, Complete in place	\$ _____	\$ _____
5.	1	EA	12" Plug and Clamp, Complete in place	\$ _____	\$ _____

**PROPOSAL BIDDING SHEET - CONTINUED  
 WATER AND DRAINAGE FACILITIES TO SERVE  
 BELLAIRE BOULEVARD EXTENSION WITHIN LAKEMONT DEVELOPMENT  
 (EAST OF LAKEMONT BEND LANE)  
 FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 122  
 CITY OF HOUSTON E.T.J., FORT BEND COUNTY, TEXAS  
 LJA JOB NO. 0385-0406**

**WATER ITEMS**

<b>ITEM NO.</b>	<b>QTY.</b>	<b>UNIT</b>	<b>ITEM DESCRIPTION</b>	<b>UNIT PRICE</b>	<b>AMOUNT</b>
6.	1	EA	Wet Connection, Includes Removal of Existing 12" Plug & Clamp, 2" Blow-off Valve & Box and Connect Proposed 12" Water Line to Existing 12" Water Line, Additionally Includes All Necessary Adapters and Connectors, and Disinfection of Existing Water Line as Applicable, Complete in place	\$ _____	\$ _____
7.	1,620	LF	Trench Safety, All Depths, Complete in place	\$ _____	\$ _____
<b>SUBTOTAL WATER ITEMS</b>				<b>\$ _____</b>	

**PROPOSAL BIDDING SHEET**

**CONSTRUCTION OF THE  
WATER AND DRAINAGE FACILITIES  
TO SERVE  
BELLAIRE BOULEVARD EXTENSION  
WITHIN LAKEMONT DEVELOPMENT  
(EAST OF LAKEMONT BEND LANE)  
FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 122  
CITY OF HOUSTON E.T.J.  
FORT BEND COUNTY, TEXAS**

**LJA JOB NO. 0385-0406**

**STORM SEWER SYSTEM ITEMS**

<b>ITEM NO.</b>	<b>QTY.</b>	<b>UNIT</b>	<b>ITEM DESCRIPTION</b>	<b>UNIT PRICE</b>	<b>AMOUNT</b>
1.	345	LF	24" RCP Storm Sewer, ASTM C-76, Class III, All Depths, Complete in place	\$ _____	\$ _____
2.	80	LF	36" RCP Storm Sewer, ASTM C-76, Class III, All Depths, Complete in place	\$ _____	\$ _____
3.	1	EA	Type "C" Manhole for 42" Storm Sewers and Smaller, All Depths, Complete in place	\$ _____	\$ _____
4.	4	EA	Stage I – Standard 5' Reinforced Concrete Precast Inlet ("H-2"), All Depths, Includes Inlet Protection Barrier for Stage I Inlet, Complete in place	\$ _____	\$ _____
5.	4	EA	Stage II – Standard 5' Reinforced Concrete Precast or Reinforced Concrete Cast-in-Place (4,000 psi) Inlet ("H-2"), Complete in place	\$ _____	\$ _____
6.	4	EA	Stage I – Modified Type "C-2" Reinforced Concrete Precast Inlet (15' Minimum Opening) All Depths, Includes Inlet Protection Barriers for Stage I Inlet, Complete in place	\$ _____	\$ _____

**PROPOSAL BIDDING SHEET - CONTINUED  
 WATER AND DRAINAGE FACILITIES TO SERVE  
 BELLAIRE BOULEVARD EXTENSION WITHIN LAKEMONT DEVELOPMENT  
 (EAST OF LAKEMONT BEND LANE)  
 FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 122  
 CITY OF HOUSTON E.T.J., FORT BEND COUNTY, TEXAS  
 LJA JOB NO. 0385-0406**

**STORM SEWER SYSTEM ITEMS**

<b>ITEM NO.</b>	<b>QTY.</b>	<b>UNIT</b>	<b>ITEM DESCRIPTION</b>	<b>UNIT PRICE</b>	<b>AMOUNT</b>
7.	4	EA	Stage II – Modified Type “C-2” Reinforced Concrete Precast or Reinforced Concrete Cast-in-Place (4,000 psi) Inlet (15’ Minimum Inside Opening), Complete in place	\$ _____	\$ _____
8.	4	EA	Break Into Existing Storm Manhole and Connect Proposed Storm Sewers (All Pipe Sizes) to Existing Storm Sewer System, Complete in place	\$ _____	\$ _____
9.	425	LF	Trench Safety, All Depths, Complete in place	\$ _____	\$ _____
10.	2	EA	Remove Existing “E” Inlet, Includes Disposal Off-Site and Disposal Fee, Complete in place	\$ _____	\$ _____
<b>SUBTOTAL STORM SEWER SYSTEM ITEMS</b>				<b>\$ _____</b>	

**PROPOSAL BIDDING SHEET**

**CONSTRUCTION OF THE  
WATER AND DRAINAGE FACILITIES  
TO SERVE  
BELLAIRE BOULEVARD EXTENSION  
WITHIN LAKEMONT DEVELOPMENT  
(EAST OF LAKEMONT BEND LANE)  
FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 122  
CITY OF HOUSTON E.T.J.  
FORT BEND COUNTY, TEXAS**

**LJA JOB NO. 0385-0406**

**MISCELLANEOUS ITEMS**

<b>ITEM NO.</b>	<b>QTY.</b>	<b>UNIT</b>	<b>ITEM DESCRIPTION</b>	<b>UNIT PRICE</b>	<b>AMOUNT</b>
1.	100	LF	Extra Reinforced Filter Fabric Fence, (To Be Used ONLY at the Direction of the Engineer), Complete in place	\$ _____ \$1.00*	\$ _____
2.	100	LF	Extra Filter Fabric Fence, (To Be Used ONLY at the Direction of the Engineer), Complete in place	\$ _____ \$1.00*	\$ _____
3.	156	SY	Stabilized Construction Exit, Complete in place	\$ _____	\$ _____
4.	1	EA	Extra Burlap Bag Barrier on Inlet, (To Be Used ONLY at the Direction of the Engineer), Complete in place	\$ _____ \$10.00*	\$ _____
5.	1	EA	Extra Silt Fence Inlet Protection Barrier, Complete in place	\$ _____ \$50.00*	\$ _____
6.	1	AC	Extra Hydro-Mulch Seeding, Complete in place	\$ _____ \$1,000.00*	\$ _____
7.	0.1	AC	Extra Clearing and Grubbing, (To Be Used ONLY at the Direction of the Engineer), Complete in place	\$ _____ \$1,000.00*	\$ _____

\* DENOTES MINIMUM UNIT PRICE BID

**PROPOSAL BIDDING SHEET - CONTINUED  
 WATER AND DRAINAGE FACILITIES TO SERVE  
 BELLAIRE BOULEVARD EXTENSION WITHIN LAKEMONT DEVELOPMENT  
 (EAST OF LAKEMONT BEND LANE)  
 FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 122  
 CITY OF HOUSTON E.T.J., FORT BEND COUNTY, TEXAS  
 LJA JOB NO. 0385-0406**

**MISCELLANEOUS ITEMS**

<b>ITEM NO.</b>	<b>QTY.</b>	<b>UNIT</b>	<b>ITEM DESCRIPTION</b>	<b>UNIT PRICE</b>	<b>AMOUNT</b>
8.	0.1	TON	Extra Water Line Fittings, Complete in place	\$ _____ \$1,000.00*	\$ _____
9.	10	CY	Extra Cement Stabilized Sand Backfill, (1.1 Sacks per Ton), (To Be Used ONLY at the Direction of the Engineer), Complete in place	\$ _____ \$15.00*	\$ _____
10.	100	LF	Extra Cost of Storm Sewer Wet Sand Construction as per City of Houston Drawing No. 02317-02 (as Shown in Sheet No. 16 of 22), All Line Sizes and Depths, (To Be Used ONLY at the Direction of the Engineer), Complete in place	\$ _____ \$5.00*	\$ _____
11.	10	LF	Extra Dewatering for Utility Lines, All Lines Sizes and Depths, (To Be Used ONLY at the Direction of the Engineer), Complete in place	\$ _____ \$20.00*	\$ _____
12.	10	CY	Extra Bank Sand Backfill, (To Be Used ONLY at the Direction of the Engineer), Complete in place	\$ _____ \$6.00*	\$ _____
13.	1	LS	Utility Spoils, Includes Hauling Excavated Material to Church Site, Stripping, Stock Piling of Strippings, Compaction to 95% Standard Proctor Density, and Reapplication of Strippings, Complete in place	\$ _____	\$ _____

\* DENOTES MINIMUM UNIT PRICE BID

**PROPOSAL BIDDING SHEET - CONTINUED  
WATER AND DRAINAGE FACILITIES TO SERVE  
BELLAIRE BOULEVARD EXTENSION WITHIN LAKEMONT DEVELOPMENT  
(EAST OF LAKEMONT BEND LANE)  
FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 122  
CITY OF HOUSTON E.T.J., FORT BEND COUNTY, TEXAS  
LJA JOB NO. 0385-0406**

**MISCELLANEOUS ITEMS**

<b>ITEM NO.</b>	<b>QTY.</b>	<b>UNIT</b>	<b>ITEM DESCRIPTION</b>	<b>UNIT PRICE</b>	<b>AMOUNT</b>
14.	1	LS	<b>Cut and Remove Existing 6" Irrigation and Construct 6" PVC Irrigation Offset (AWWA C-900, DR 14, Class 200, With Restrained Joints ASTM A536, ANSI A21.11 / AWWA C111, Colored Purple, All Depths) as Necessary to Avoid Conflict with Proposed 12" Water Line at Sta. 32+30 (7' LT), Includes Disposal Off-Site and Disposal Fee, (To Be Used ONLY at the Direction of the Engineer), Complete in place</b>	\$ _____	\$ _____
15.	6	EA	<b>Adjust Existing Manhole Rim Elevation as Required (To Be Used ONLY at the Direction of the Engineer), Complete in place</b>	\$ _____ \$150.00*	\$ _____
16.	52	SY	<b>Remove Existing Gravel Road, Includes Disposal Off-Site and Disposal Fee, Complete in place</b>	\$ _____	\$ _____
17.	1	LS	<b>Storm Water Pollution Inspection Reports Conducted on a Weekly Basis According to TCEQ Permit, Complete in place</b>	\$ _____	\$ _____
18.	100	LF	<b>Extra 6" PVC Irrigation, AWWA C-900, DR 18, Class 150, Colored Purple, All Depths, Includes All Fittings, Complete in place</b>	\$ _____ \$8.00*	\$ _____

\* DENOTES MINIMUM UNIT PRICE BID

**PROPOSAL BIDDING SHEET - CONTINUED**  
**WATER AND DRAINAGE FACILITIES TO SERVE**  
**BELLAIRE BOULEVARD EXTENSION WITHIN LAKEMONT DEVELOPMENT**  
**(EAST OF LAKEMONT BEND LANE)**  
**FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 122**  
**CITY OF HOUSTON E.T.J., FORT BEND COUNTY, TEXAS**  
**LJA JOB NO. 0385-0406**

**MISCELLANEOUS ITEMS**

<b>ITEM NO.</b>	<b>QTY.</b>	<b>UNIT</b>	<b>ITEM DESCRIPTION</b>	<b>UNIT PRICE</b>	<b>AMOUNT</b>
19.	100	LF	Extra 12" PVC Water Pipe, AWWA C-900, DR 14, Class 200, with all Restrained Joints (ASTM A536, ANSI A21.11/AWWA C111) for Pipe Joints and Fittings, All Depths, Complete in place	\$ _____ \$50.00*	\$ _____
<b>SUBTOTAL MISCELLANEOUS ITEMS</b>				<b>\$ _____</b>	

\* DENOTES MINIMUM UNIT PRICE BID

**PROPOSAL BIDDING  
SUMMATION SHEET**

**CONSTRUCTION OF THE  
WATER AND DRAINAGE FACILITIES  
TO SERVE  
BELLAIRE BOULEVARD EXTENSION  
WITHIN LAKEMONT DEVELOPMENT  
(EAST OF LAKEMONT BEND LANE)  
FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 122  
CITY OF HOUSTON E.T.J.  
FORT BEND COUNTY, TEXAS**

**LJA JOB NO. 0385-0406**

SUBTOTAL WATER ITEMS	\$ _____
SUBTOTAL STORM SEWER SYSTEM ITEMS	\$ _____
SUBTOTAL MISCELLANEOUS ITEMS	\$ _____
TOTAL AMOUNT BID	\$ _____

It is understood that in the event the successful bidder fails to enter into the Contract and to furnish a Performance Bond and Payment Bond in the amount of 100 percent of the Contract and for all parts of the work, as specified in the Instructions to Bidders, the Bidder will forfeit the Cashier's Check OR Bid Bond, as provided in the Contract Documents.

The undersigned proposes, if awarded the Contract, to begin work as stipulated in the written Notice to Proceed issued by the Engineer, and to substantially complete the work within 30 calendar days after the date the work commences and to complete the project within 40 calendar days after the date of work commences.

This bid proposal shall be considered part of the contract.

\_\_\_\_\_  
(Signature)

\_\_\_\_\_  
(Company Name – Bidder)

\_\_\_\_\_  
(Type Name)

\_\_\_\_\_  
(Address)

\_\_\_\_\_  
(Title)

\_\_\_\_\_  
(City)                      (County)                      (Zip)

\_\_\_\_\_  
(Attest)

\_\_\_\_\_  
(Phone No.)

(Seal, If Bidder is a Corporation)

\_\_\_\_\_  
(Fax No.)

\_\_\_\_\_  
(E-mail Address)

**CONSTRUCTION OF THE  
WATER AND DRAINAGE FACILITIES  
TO SERVE  
BELLAIRE BOULEVARD EXTENSION  
WITHIN LAKEMONT DEVELOPMENT  
(EAST OF LAKEMONT BEND LANE)  
FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 122  
CITY OF HOUSTON E.T.J.  
FORT BEND COUNTY, TEXAS**

**LJA JOB NO. 0385-0406**

**ACKNOWLEDGMENT OF RECEIPT OF ADDENDUM**

ADDENDUM NO. 1 _____	_____
Signature	Date
ADDENDUM NO. 2 _____	_____
Signature	Date
ADDENDUM NO. 3 _____	_____
Signature	Date
ADDENDUM NO. 4 _____	_____
Signature	Date
ADDENDUM NO. 5 _____	_____
Signature	Date
ADDENDUM NO. 6 _____	_____
Signature	Date