

**ADDENDUM NO. 1  
CONSTRUCTION OF THE  
WATER, SANITARY SEWER AND DRAINAGE FACILITIES  
TO SERVE  
MAR BELLA SECTION 10B  
GALVESTON COUNTY MUNICIPAL UTILITY DISTRICT NO. 46  
CITY OF LEAGUE CITY  
GALVESTON COUNTY, TEXAS**

**JUNE 11, 2010**

**LJA JOB NO. 0074-0534D (9.4)**


---

The following changes will be considered part of the Construction Plans, Bid Proposal and Contract Documents:

1.) Reference: **Contract Documents – Bid Proposal**

Replace: Pages 7, 8, and 9 of 11 with revised Pages 7, 8, and 9 of 11 (attached).

There are no other changes or revisions to the Construction Plans, Bid Proposal and Contract Documents at this time.

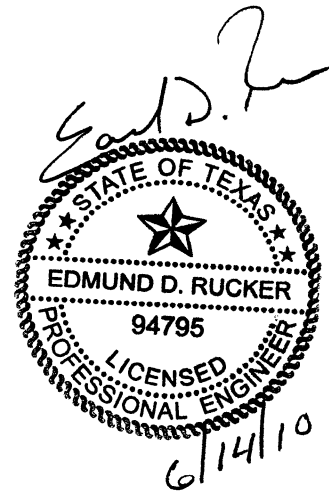

**PROPOSAL BIDDING SHEET**

**CONSTRUCTION OF THE  
WATER, SANITARY SEWER AND DRAINAGE FACILITIES  
TO SERVE  
MAR BELLA SECTION 10B  
GALVESTON COUNTY MUNICIPAL UTILITY DISTRICT NO. 46  
CITY OF LEAGUE CITY  
GALVESTON COUNTY, TEXAS  
LJA JOB NO. 0074-0534D**

**STORM SEWER ITEMS**

<b>ITEM NO.</b>	<b>QTY.</b>	<b>UNIT</b>	<b>ITEM DESCRIPTION</b>	<b>UNIT PRICE</b>	<b>AMOUNT</b>
1.	999	LF	24" RCP Storm Sewer, ASTM C-76, Class III, All Depths, Complete in place	\$ _____	\$ _____
2.	164	LF	30" RCP Storm Sewer, ASTM C-76, Class III, All Depths, Complete in place	\$ _____	\$ _____
3.	336	LF	36" RCP Storm Sewer, ASTM C-76, Class III, All Depths, Complete in place	\$ _____	\$ _____
4.	720	LF	42" RCP Storm Sewer, ASTM C-76, Class III, All Depths, Complete in place	\$ _____	\$ _____
5.	123	LF	54" RCP Storm Sewer, ASTM C-76, Class III, All Depths, Complete in place	\$ _____	\$ _____
6.	16	EA	Type "C" Manhole for 42" Storm Sewers and Smaller, Complete in place	\$ _____	\$ _____
7.	1	EA	Type "C" Manhole for 48" and Larger Storm Sewers, All Depths, Complete in place	\$ _____	\$ _____

**PROPOSAL BIDDING SHEET - CONTINUED  
 WATER, SANITARY SEWER AND DRAINAGE FACILITIES  
 TO SERVE MAR BELLA SECTION 10B  
 GALVESTON COUNTY MUNICIPAL UTILITY DISTRICT NO. 46  
 CITY OF LEAGUE CITY, GALVESTON COUNTY, TEXAS  
 LJA JOB NO. 0074-0534D**

**STORM SEWER ITEMS**

<b>ITEM NO.</b>	<b>QTY.</b>	<b>UNIT</b>	<b>ITEM DESCRIPTION</b>	<b>UNIT PRICE</b>	<b>AMOUNT</b>
8.	1	EA	Type "C" Manhole for 42" Storm Sewers and Smaller with Grate Inlet Top, Complete in place	\$ _____	\$ _____
9.	1	EA	Type "A" Inlet with Grate Top, Complete in place	\$ _____	\$ _____
10.	14	EA	Stage I – Standard 5' Precast Inlet ("H-2"), All Depths, Includes Temporary Silt Barrier Fence for Stage I Inlets, Complete in place	\$ _____	\$ _____
11.	14	EA	Stage II – Standard 5' Precast Inlet ("H-2"), Complete in place	\$ _____	\$ _____
12.	1	EA	8" Thick Brick Plug for 36" Storm Sewer, Complete in place	\$ _____	\$ _____
13.	1	LS	Break Into Existing Storm Manhole and Connect Proposed 54" Storm Sewer, Complete in place	\$ _____	\$ _____
14.	155	LF	"V" Bottom Swale with 3:1 Side Slopes, Complete in place	\$ _____	\$ _____
15.	1	EA	Remove Existing 8" Thick Brick Plug, Complete in place	\$ _____	\$ _____
16.	2,342	LF	Trench Safety, (All Depths), Complete in place	\$ _____	\$ _____
<b>SUBTOTAL STORM SEWER ITEMS</b>				<b>\$ _____</b>	

PROPOSAL BIDDING SHEET

CONSTRUCTION OF THE  
WATER, SANITARY SEWER AND DRAINAGE FACILITIES  
TO SERVE  
MAR BELLA SECTION 10B  
GALVESTON COUNTY MUNICIPAL UTILITY DISTRICT NO. 46  
CITY OF LEAGUE CITY  
GALVESTON COUNTY, TEXAS  
LJA JOB NO. 0074-0534D

MISCELLANEOUS ITEMS

ITEM NO.	QTY.	UNIT	ITEM DESCRIPTION	UNIT PRICE	AMOUNT
1.	3,107	LF	Bedding and Backfill for Wet Sand Construction and Unsatisfactory Soil Conditions (Per Detail) (To Be Used ONLY as Directed by the Engineer), Complete in place	\$ _____ \$5.00*	\$ _____
2.	100	CY	Extra Cement Stabilized Sand Backfill, (1.5 Sacks Per Ton), (To Be Used ONLY as Directed by the Engineer), Complete in place	\$ _____ \$25.00*	\$ _____
3.	3,107	LF	Dewatering, (To Be Used ONLY as Directed by the Engineer), Complete in place	\$ _____ \$15.00*	\$ _____
<b>SUBTOTAL MISCELLANEOUS ITEMS</b>				<b>\$ _____</b>	

\* Denotes Minimum Unit Price Bid for Each Item