

**ADDENDUM NO. 1
CONSTRUCTION OF THE
WATER, SANITARY SEWER AND DRAINAGE FACILITIES
TO SERVE
BONBROOK PLANTATION NORTH
SECTION 3
FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 155
CITY OF ROSENBERG E.T.J.
FORT BEND COUNTY, TEXAS**

February 22, 2010

LJA JOB NO. 1406-4103D (9.4)

The following changes will be considered part of the Construction Plans, Bid Proposal and Contract Documents:

1.) Reference: **Contract Documents – Bid Proposal**


Replace: Pages 8, 9 and 10 of 14 with revised Pages 8, 9, and 10 of 14 (attached).

Clarification: Revisions to the plans will be issued with the construction set.

2.) Reference: **Construction Plans – Grading Plan**

Clarification: Utility spoils shall be placed on the back of lots on Block 1 Lots 3-30, including stripping at no additional cost.

There are no other changes or revisions to the Construction Plans, Bid Proposal and Contract Documents at this time.

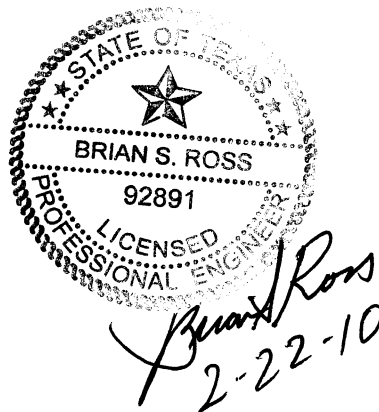

PROPOSAL BIDDING SHEET

**CONSTRUCTION OF THE
WATER, SANITARY SEWER AND DRAINAGE FACILITIES
TO SERVE
BONBROOK PLANTATION NORTH SECTION 3
FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 155
CITY OF ROSENBERG, E.T.J.
FORT BEND COUNTY, TEXAS
LJA JOB NO. 1406-4103D**

DRAINAGE FACILITIES ITEMS

ITEM NO.	QTY.	UNIT	ITEM DESCRIPTION	UNIT PRICE	AMOUNT
1.	1,256	LF	24" R.C.P., Storm Sewer, ASTM C-76, Class III, All Cuts, Complete in place	\$ _____	\$ _____
2.	430	LF	30" R.C.P., Storm Sewer, ASTM C-76, Class III, All Cuts, Complete in place	\$ _____	\$ _____
3.	225	LF	36" R.C.P., Storm Sewer, ASTM C-76, Class III, All Cuts, Complete in place	\$ _____	\$ _____
4.	91	LF	48" R.C.P., Storm Sewer, ASTM C-76, Class III, All Cuts, Complete in place	\$ _____	\$ _____
5.	11	EA	Stage I – Standard 5' Precast Inlet ("H-2"), All Depths, Includes Temporary Silt Barrier Fence for Stage I Inlets, Complete in place	\$ _____	\$ _____
6.	11	EA	Stage II – Standard 5' Precast Inlet ("H-2")(Includes Temporary Sand-Filled Burlap Bags for Erosion and Sediment Control), Complete in place	\$ _____	\$ _____
7.	3	EA	Stage I – 10' Precast Curb Inlet, All Depths, Includes Temporary Silt Barrier Fence for Stage I Inlets, All Depths, Complete in place	\$ _____	\$ _____

**PROPOSAL BIDDING SHEET - CONTINUED
WATER, SANITARY SEWER AND DRAINAGE FACILITIES
TO SERVE BONBROOK PLANTATION NORTH SECTION 3
FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 155
CITY OF ROSENBERG E.T.J., FORT BEND COUNTY, TEXAS
LJA JOB NO. 1406-4103D**

DRAINAGE FACILITIES ITEMS

ITEM NO.	QTY.	UNIT	ITEM DESCRIPTION	UNIT PRICE	AMOUNT
8.	3	EA	Stage II – 10' Precast Curb Inlet (Includes Temporary Sand-Filled Burlap Bags for Erosion and Sediment Control), All Depths, Complete in place	\$ _____	\$ _____
9.	1	EA	Type "E" Inlet (Includes Temporary Silt Barrier Fence), Complete in place	\$ _____	\$ _____
10.	1	EA	Type "A" Inlet (Includes Temporary Silt Barrier Fence), Complete in place	\$ _____	\$ _____
11.	32	LF	Extreme Event Overflow Swale, 10' Bottom Width and 4:1 Side Slopes, Complete in place	\$ _____	\$ _____
12.	110	SY	Cellular Concrete Mattress, Complete in place	\$ _____	\$ _____
13.	10	EA	Type "C" Manhole for 42" Storm Sewer and Smaller, All Depths, Includes Final Adjustments of Manhole Tops, Complete in place	\$ _____	\$ _____
14.	2	EA	Type "C" Manhole for 48" to 72" Storm Sewer, All Depths, Includes Final Adjustments of Manhole Tops, Complete in place	\$ _____	\$ _____
15.	2,002	LF	Trench Safety System, All Depths, Complete in place	\$ _____	\$ _____

**PROPOSAL BIDDING SHEET - CONTINUED
 WATER, SANITARY SEWER AND DRAINAGE FACILITIES
 TO SERVE BONBROOK PLANTATION NORTH SECTION 3
 FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 155
 CITY OF ROSENBERG E.T.J., FORT BEND COUNTY, TEXAS
 LJA JOB NO. 1406-4103D**

DRAINAGE FACILITIES ITEMS

ITEM NO.	QTY.	UNIT	ITEM DESCRIPTION	UNIT PRICE	AMOUNT
16.	1	LS	Break Into Existing Storm Manhole #D-13 and Connect Proposed 24" and 48" Storm Sewers, Complete in place	\$ _____	\$ _____
17.	1,500	LF	Drainage Swales, Including Excavation, Hauling and Grading of Future R.O.W.'s and Existing Pipeline Easement, Also Includes Regrading of Existing Swales, (To Be Used ONLY as Directed by the Engineer), Complete in place	\$ _____	\$ _____
18.	1	EA	8" Brick Storm Sewer Plug, All Sizes, Complete in place	\$ _____	\$ _____
SUBTOTAL DRAINAGE FACILITIES ITEMS				\$ _____	